



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	PRODUCTION RELEASE	5.23.06	

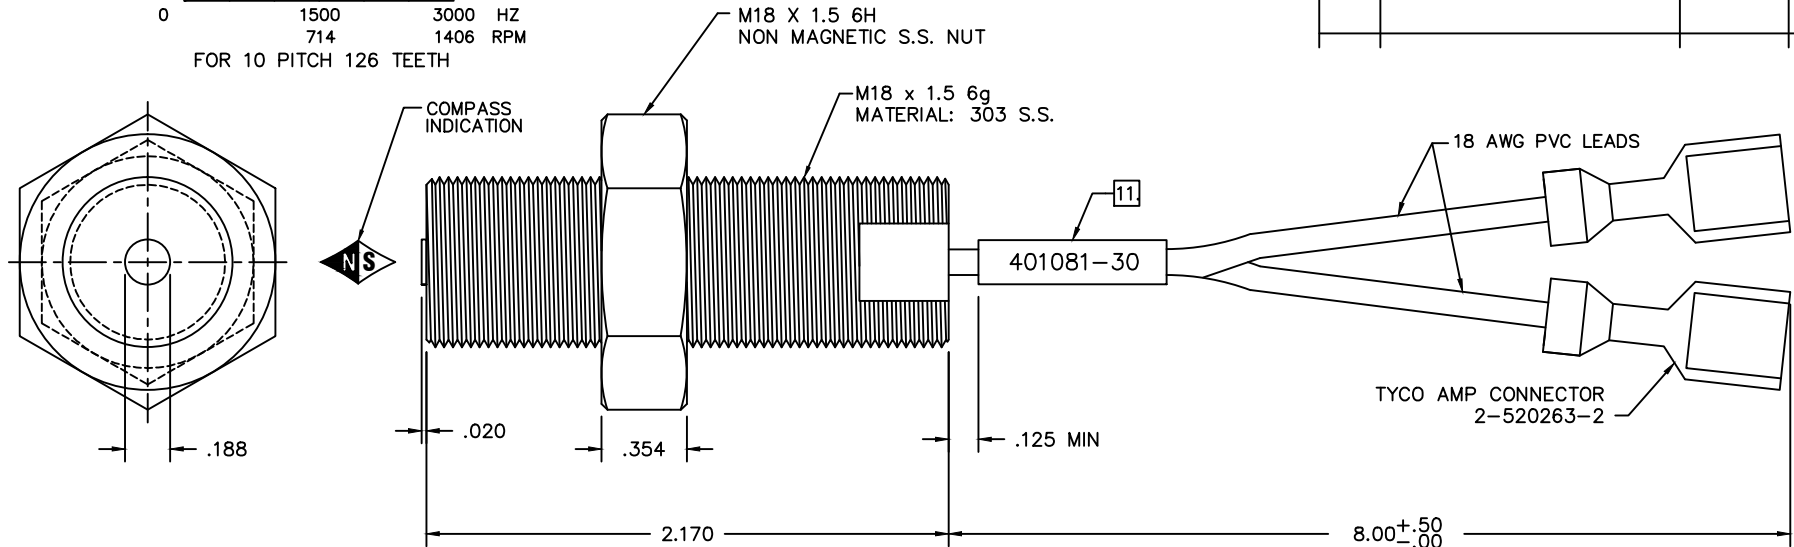

**SPECIFICATIONS:**

1. RESISTANCE: 180 ± 20% OHMS AT 25°C
2. INDUCTANCE: 60 mH (REF).
3. OUTPUT VOLTAGE: SEE GRAPH
4. AIR GAP: SEE GRAPH
5. TEST WHEEL: 10 PITCH GEAR
6. SURFACE SPEED: SEE GRAPH
7. LOAD: 100 K OHMS.
8. POLARITY: WHITE LEAD POSITIVE WITH RESPECT TO RED LEAD WITH THE APPROACH OF A FERROUS TARGET
9. TEMPERATURE RANGE (OPERATING): -40° C TO 125° C
10. HIGH POT: 500V ± 15 VRMS MIN (LEAD WIRES TO CASE).
11. BLACK INK STAMP, WHITE SHRINK TUBING "401081-30" AND DATE CODE (MM-YYYY) USING .062 NOM CHARACTERS.
12. EACH LEAD MUST WITHSTAND A 2 LB PULL TEST.
13. ENVIRONMENTAL: CORROSION PROOF AND FUNGUS RESISTANT. HUMIDITY UP TO 100%

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS: DECIMALS: ANGLES: ±1/64 .XX ±.01 ±1/2° .XXX ±.005		CONTRACT NO.		 MAGNETIC SENSORS CORPORATION 1365 N. McCAN STREET ANAHEIM, CA 92806	
		MATERIAL		APPROVALS			
		FINISH		DRAWN C.R.		5.23.06	
		DO NOT SCALE DRAWING		CHECKED			
NEXT ASSY		USED ON		APPRVD			
APPLICATION				S26658 REV. A			
				SIZE		CODE INDENT	
				B		OLVP6	
				DRAWING NO.		401081-30	
				SCALE: NONE		REF. SK11355	
				SHEET		1 OF 1	